

## PUBLIC MEETING NOTICE

### ANALYSIS OF BROWNFIELDS CLEANUP ALTERNATIVES (ABCA)


Caribou Diesel Electric Power Plant and Associated Outbuildings  
142 Lower Lyndon St. Caribou, MAINE

Tuesday, January 30 at 6p.m.

The City of Caribou will hold a public meeting to discuss and solicit comments about the Analysis of Brownfields cleanup Alternatives (ABCA) for the Brownfields Cleanup Project at 142 Lower Lyndon St. (Map 25 Lot 149AA) in Caribou, Maine on Tuesday, January 30, 2024, at 6pm at Caribou City Hall. During this public meeting, project representatives will discuss the alternative and recommended cleanup strategies for the site.

The City is currently receiving public comments on this document, and the public comment period will run 30 days, ending on February 19, 2024. The information repository on this project, including the ABCA, prior environmental assessments, and other environmental information can be viewed on the City's website ([www.cariboumaine.org/grants](http://www.cariboumaine.org/grants)) or at City Hall at 25 High St., Caribou, Maine during normal business hours. Public comments can also be emailed to [pthompson@cariboumaine.org](mailto:pthompson@cariboumaine.org) until 4pm on February 19, 2024.

For more information, contact Penny Thompson at [citymanager@cariboumaine.org](mailto:citymanager@cariboumaine.org) or Michelle Hersey (Qualified Environmental Professional) at [mhersey@countyee.com](mailto:mhersey@countyee.com).

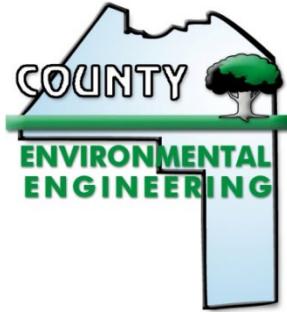

## County Environmental Engineering, Inc.

November 15, 2022

Penny Thompson  
City of Caribou  
25 High Street  
Caribou, Maine 04736

Re: Draft Analysis of Brownfields Cleanup Alternatives  
Caribou Diesel Electric Power Plant and Associated Outbuildings  
142 Lower Lyndon Street, Caribou, Maine

Dear Penny:

This draft analysis of Brownfields cleanup alternatives (ABCA) was prepared for the Caribou Diesel Electric Power Plant and Associated Outbuildings (Site) located at 142 Lower Lyndon Street in Caribou, Maine. The purpose of this ABCA is to evaluate remedial alternatives for waste oil, hazardous substances, asbestos-containing materials (ACM), lead-based paint (LBP), universal and hazardous waste at the Site. Remedial alternatives evaluated for waste oil and hazardous substances include No Action and Removal. Remedial alternatives evaluated for ACM, LBP, universal and hazardous waste include No Action and Abatement.

### Site Location and History

As shown on the attached Location Map (Figure 1), the Site is located on the west side of the Aroostook River near the historic Caribou dam (circa 1889). As shown on the attached Site Map (Figure 2), the Site (3.2 acres) is developed with a 12,200-square foot diesel plant, diesel pump house, oil tank building, north storage building, oil storage building, pump station, and south storage building. The total building footprint at the Site is approximately 17,300 square feet. The surrounding area consists of an abandoned steam electric power plant, abandoned bulk plant, active electrical switch station, inactive hydroelectric plant, and former municipal water filter plant.

The diesel plant was constructed in 1949 and operated by Maine Public Service (1943 – 1999) and PDI New England (1999 – 2013). The diesel plant was deactivated in 2012 and the Site was acquired by Merlin One in 2013. The Site has been vacant for several years and the buildings are in poor repair. The City of Caribou acquired the Site in 2019 through automatic lien foreclosure. City efforts to secure the Site and repeated patrols have not deterred trespassers from vandalism and other criminal activities.

## Previous Environmental Investigations

A Phase I Environmental Site Assessment (ESA) was completed at the Site on August 5, 2021. Recognized environmental conditions identified in the Phase I ESA include: fossil fuel electric power generation; bulk plant; polychlorinated biphenyls; significant diesel releases; discharge outfalls; underground storage tanks; tanks, drums and oil-filled operational equipment; pesticide release; and railroad tracks. A Phase II ESA was completed at the Site on May 14, 2022. Sixteen soil samples, six groundwater samples and three porewater samples were collected at the Site and surrounding area for the Phase II ESA. Petroleum and hazardous substances were detected in site soils, but below regulatory guidelines.

A hazardous building materials survey was completed at the Site on May 8, 2022. As summarized on the tables below, approximately 11,320 gallons of waste oil and hazardous substances were inventoried at the Site, including stored diesel, lube oil, waste oil, waste oil-contaminated water, sludge, antifreeze, degreaser/solvent, and water treatment chemicals.

<b>Diesel Plant Tanks, Drums and Containers</b>			
<b>Description</b>	<b>Contents</b>	<b>Size</b>	<b>Quantity</b>
Diesel Plant Used Oil Tank	waste oil	275 gal	275 gal
Diesel Plant Unit #2 Day Tank	diesel	320 gal	320 gal
Diesel Plant Unit #3 Day Tank	diesel	320 gal	320 gal
Diesel Plant Unit #4 Day Tank	diesel	230 gal	230 gal
Diesel Plant Unit #5 Day Tank	diesel	320 gal	320 gal
Engine Lube Oil System Unit #2	lube oil	1,375 gal	1,375 gal
Engine Lube Oil System Unit #3	lube oil	1,375 gal	1,375 gal
Engine Lube Oil System Unit #4	lube oil	550 gal	550 gal
Engine Lube Oil System Unit #5	lube oil	550 gal	550 gal
Oil/Water Separator	waste oil/water/sludge	unknown	~100 gal
Dirty Oil Tank	waste oil	1,000 gal	1,000 gal
Clean Oil Tank	waste oil	1,800 gal	1,800 gal
Waste Oil Drums (6) and pails	waste oil	55 gal	~350 gal
Chemical Drums (6)	water treatment	55 gal	~350 gal
Miscellaneous Drums (3)	antifreeze, lube oil	55 gal	~100 gal
Empty Drums (5)	transformer oil, unknown	55 gal	residual

<b>Oil Storage Building Drums</b>			
<b>Description</b>	<b>Contents</b>	<b>Size</b>	<b>Contents</b>
Waste Oil Drums (19)	waste oil	55 gal	~1,000 gal
Anti-Freeze Drums (18)	antifreeze	55 gal	~1,000 gal
Miscellaneous Drum (1)	degreaser/solvent	55 gal	55 gal
Empty Drums (31)	unknown	55 gal	residual

<b>Oil Tank Building Tank</b>			
<b>Description</b>	<b>Contents</b>	<b>Size</b>	<b>Quantity</b>
Tank #4, ~6 inches of product	diesel	15,000 gal	~250 gal

As summarized on the tables below, ACM ( $\geq 1\%$  asbestos) was identified at the Site in roofing (12,500 square feet), window glaze (1,600 square feet), floor tile and mastic (600 square feet), and stored material (white board insulation). Electrical wire coating and gaskets were presumed positive for asbestos.

<b>Diesel Plant Asbestos-Containing Building Materials</b>			
<b>Description</b>	<b>Est. Quantity</b>	<b>Location</b>	<b>Sample ID</b>
ACM black roof material	12,200 square feet	Roof (tar and gravel)	TGR29, TGR30
ACM window glazing	1,400 square feet	Exterior windows	WG26
ACM black floor tile with ACM black mastic	600 square feet	Second floor lab, file room and hallway	FT24A
ACM gaskets	not quantified	Piping connections, stored material	presume positive
ACM electrical wire coating	not quantified	Electrical wiring	presume positive

<b>Diesel Pump House Asbestos-Containing Building Materials</b>			
<b>Description</b>	<b>Est. Quantity</b>	<b>Location</b>	<b>Sample ID</b>
ACM black roof material	270 square feet	Roof (tar and gravel)	TGR19B

<b>South Storage Building Asbestos-Containing Materials</b>			
<b>Description</b>	<b>Est. Quantity</b>	<b>Location</b>	<b>Sample ID</b>
ACM white board insulation	not quantified	Stored material	WBI16

<b>Pump Station, Oil Storage Building and North Storage Building Asbestos-Containing Building Materials</b>			
<b>Description</b>	<b>Est. Quantity</b>	<b>Location</b>	<b>Sample ID</b>
ACM window glazing*	200 square feet	Exterior windows	WG21A

\*Trace asbestos ( $< 1\%$  asbestos) was detected in window caulk at the pump station.

Limited areas with lead-based paint (LBP) were identified at the diesel plant (black/yellow pipe, gray window frame and yellow exterior strip), oil storage building (MSDS box) and north storage building (gray door). Universal and hazardous waste was identified at the Site, including mercury-containing fixtures and components, UPS batteries (75) at the diesel plant, potential lead-containing glass block windows at the diesel plant (500 square feet) and diesel pump house (75 square feet), potential PCB-containing ballasts, and e-waste. Waste oil, hazardous substances, ACM, universal and hazardous waste at the Site represent a material threat of a future release and pose a substantial risk to human health and the environment due to vandalism and proximity to the Aroostook River.

## **Evaluation of Remedial Alternatives for Waste Oil and Hazardous Substances**

The cleanup goal for the Site in regards to waste oil and hazardous substances is to eliminate the risk of a release to the environment. The primary routes of contaminant migration include surface flow and floor drains in the diesel plant with discharge outfalls at the Aroostook River. Potential exposure routes include dermal contact and inhalation of vapors. Potential receptors include future site workers and the Aroostook River.

### No Action Alternative

The Site would remain unchanged with the No Action alternative. The No Action alternative is not protective of human health or the environment. The potential for a release to the environment would continue to exist at the Site and the resilience to address potential adverse impacts caused by extreme weather events would remain unchanged. The No Action alternative is not consistent with the cleanup goal for waste oil and hazardous substances at the Site.

### Removal Alternative

All waste oil and hazardous substances at the Site would be removed for off-site disposal by a Maine licensed Hazardous Waste Transporter under the Removal alternative. Waste oil will require field testing and possibly further analysis for hazardous waste characteristics. All waste oil and hazardous substances will be properly removed, transported and disposed in accordance with state and federal regulations, including OSHA Hazardous Waste Operations and Emergency Management Standards and Maine Waste Oil Management Rules.

Cleanup planning and on-site oversight will be provided by a Qualified Environmental Professional (QEP). The Removal alternative provides adequate protection of human health and the environment. The resilience to address potential adverse impacts caused by extreme weather events would be greatly improved. The Removal alternative would meet the cleanup goal for waste oil and hazardous substances at the Site. The cost for the Removal alternative is \$70,000 if waste oil meets state specifications or \$120,000 if waste oil is contaminated with solvents.

## **Evaluation of Remedial Alternatives for ACM, LBP, Universal and Hazardous Waste**

The cleanup goal for the Site in regards to ACM, LBP, universal and hazardous waste is to eliminate the risk of human contact to asbestos, mercury, lead, PCBs and other hazardous materials. The primary route of contaminant migration is release into the air, buildings or environment by disturbance of ACM, LBP, universal and hazardous waste. Potential exposure routes include direct contact, ingestion and inhalation of vapors and asbestos fibers. Potential receptors include future site workers and the Aroostook River.

### No Action Alternative

The Site would remain unchanged with the No Action alternative. The No Action alternative is not protective of human health or the environment. The potential for exposure to asbestos mercury, lead, PCBs and other hazardous materials would continue to exist at the Site and the resilience to address potential adverse impacts caused by extreme weather events would remain unchanged. The No Action alternative is not consistent with the cleanup goal for ACM, LBP, universal and hazardous waste at the Site.

### Abatement Alternative

All ACM, LBP, universal and hazardous waste at the site will be removed for off-site disposal by a Maine licensed Asbestos Abatement Contractor, Hazardous Waste Transporter and/or demolition contractor, as necessary, under the Abatement alternative. Removal of the asbestos roofing at the diesel plant and diesel pump house requires demolition of these structures due to the poor condition of the buildings, quantity (12,500 square feet) and type of roofing system (flat tar and gravel roof).

Encapsulation (covering) or removal and replacement (patching) of asbestos roofing at the diesel plant and diesel pump house are not feasible options due to the existing structural damage of the roofing systems at these structures. All ACM, LBP, universal waste, hazardous waste, and demolition debris will be properly removed, transported and disposed in accordance with OSHA General and Construction Standards, Maine Asbestos Management Regulations, Universal Waste and Solid Waste Management Rules.

Cleanup planning and on-site oversight will be provided by a QEP. Impacts to the adjacent electrical switch station owned by Versant Power may be necessary to conduct cleanup at the diesel plant and diesel pump house. The QEP will coordinate all cleanup planning and remedial activities with adjacent property owners and secure all necessary permits, permissions and approvals to work near the electrical switch station. The Abatement alternative provides adequate protection of human health and the environment. The resilience to address potential adverse impacts caused by extreme weather events would be greatly improved.

The Abatement alternative would meet the cleanup goal for identified ACM, LBP, universal and hazardous waste at the Site. The cost for the Abatement alternative is \$685,000 to remove the ACM roofing (\$145,000), window glaze (\$55,000), floor tile/mastic (\$25,000), stored material, electrical wire coating and gaskets (\$35,000), LBP, universal and hazardous waste (\$25,000), and demolish the diesel plant and diesel pump house (\$400,000).

### **Conclusion and Recommendations**


Remedial alternatives evaluated for waste oil and hazardous substances at the Site include No Action and Removal. The Removal alternative would address the current risk of a release to the environment. The No Action alternative does not meet the cleanup goal for the Site in regards to waste oil and hazardous substances. We recommend the Removal alternative for waste oil and hazardous substances at the Site.


Remedial alternatives evaluated for ACM, LBP, universal and hazardous waste at the Site include No Action and Abatement. The Abatement alternative would address the current risk of exposure to asbestos, mercury, lead, PCBs and other hazardous materials. The No Action alternative does not meet the cleanup goal for the Site in regards to identified ACM, LBP, universal and hazardous waste. We recommend the Abatement alternative for ACM, LBP, universal and hazardous waste at the Site.

*Draft Analysis of Brownfields Cleanup Alternatives  
Caribou Diesel Electric Power Plant and Associated Outbuildings, 142 Lower Lyndon Street, Caribou, Maine*


Thank you for the opportunity to offer our services on this project and please don't hesitate to contact us if you have any questions, comments or concerns.

Respectfully Submitted,  
**County Environmental Engineering, Inc.**

  
Michelle Hersey, PE, LG  
President

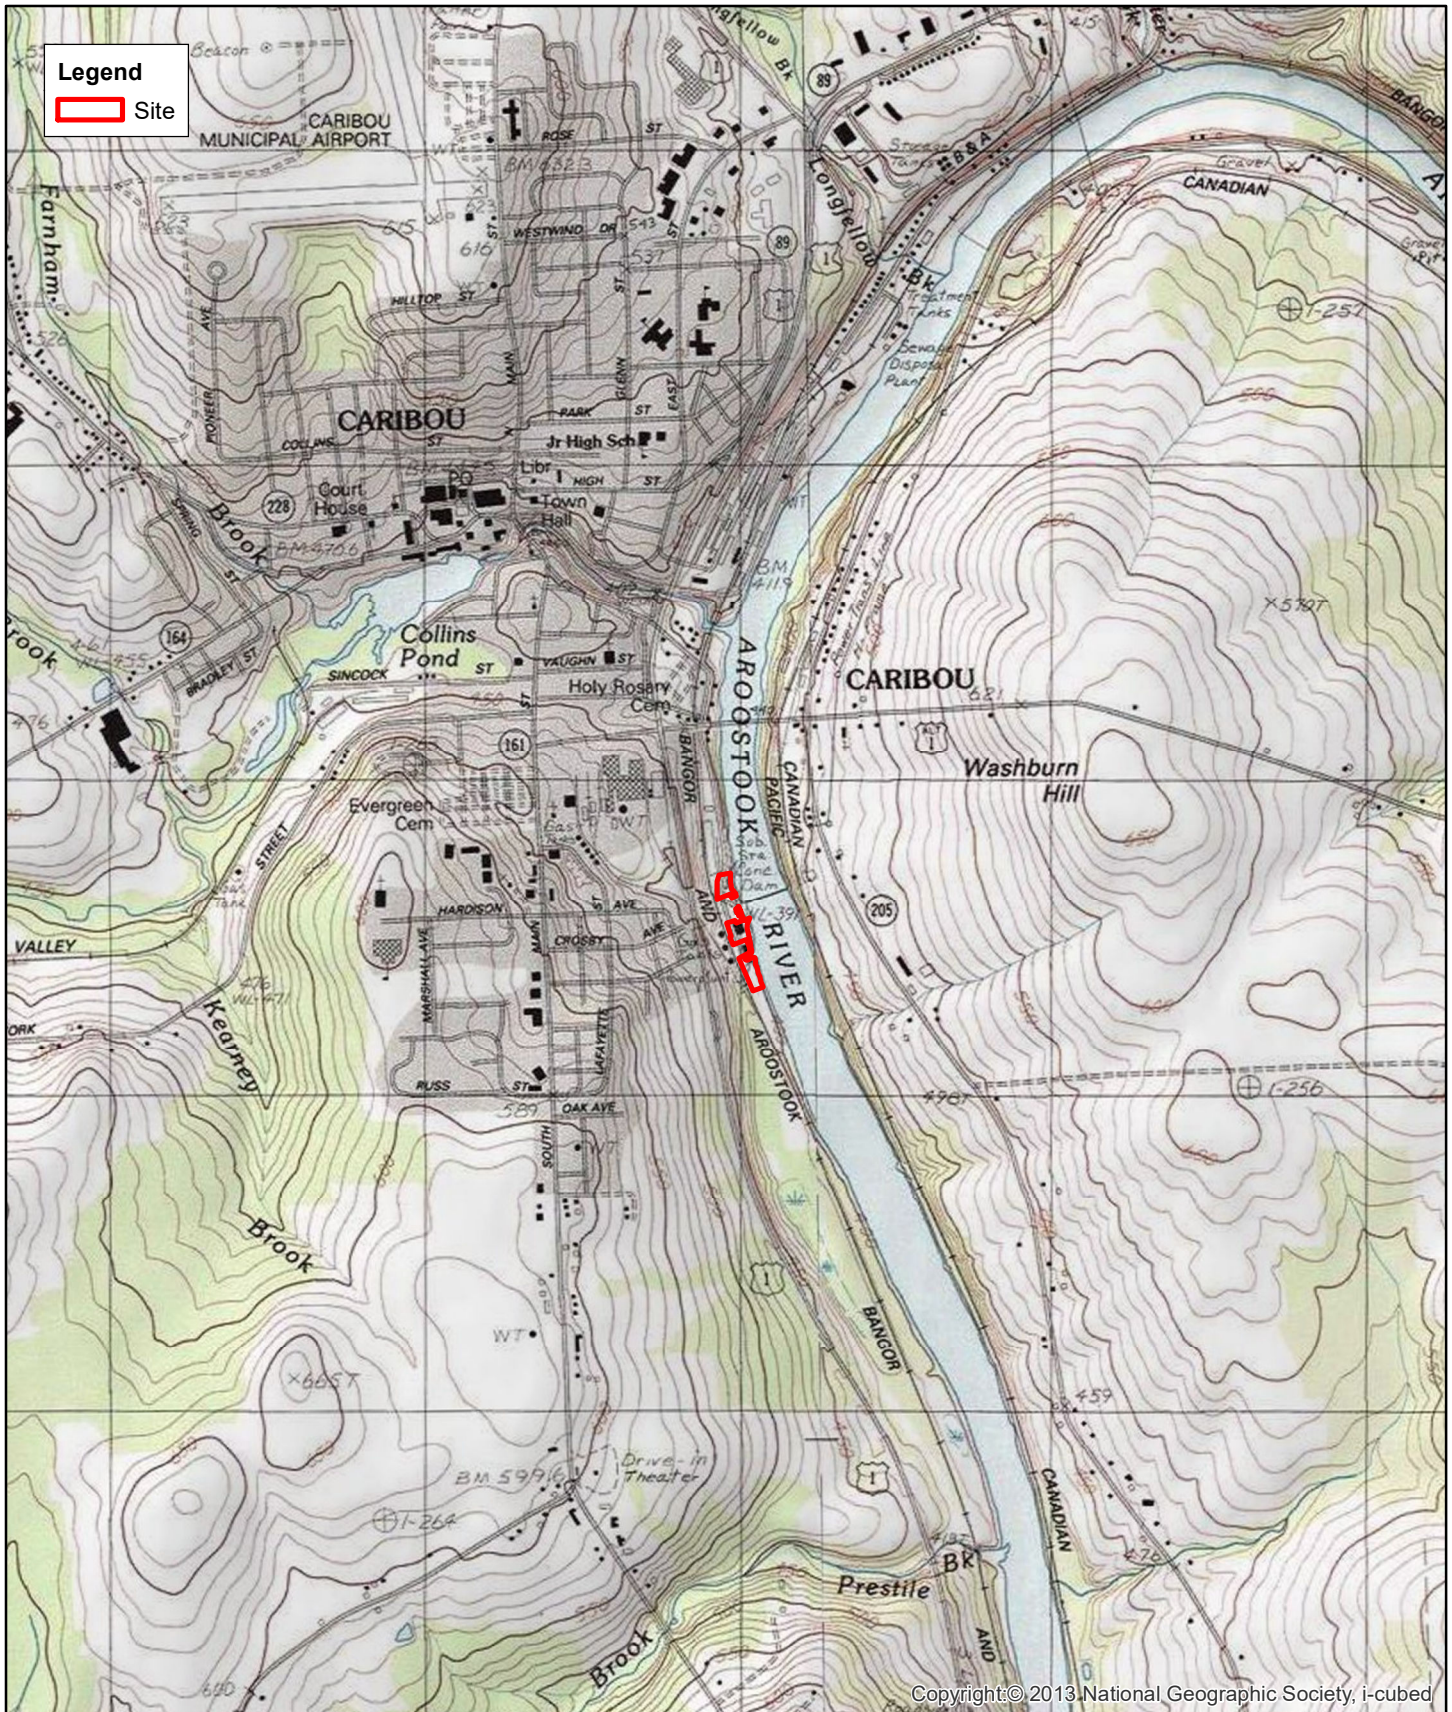

Copyright © 2013 National Geographic Society, i-cubed



Location Map

0 1,000 2,000 4,000 Feet

Analysis of Brownfields Cleanup Alternatives  
 Diesel Electric Power Plant and Associated Outbuildings  
 142 Lower Lyndon Street, Caribou  
 Aroostook County, Maine

Figure 1


Scale: 1:24,000

Project: 227-07

Drawn By: MDH  
 Date: 11/12/2022







Site Map

Analysis of Brownfields Cleanup Alternatives  
 Diesel Electric Power Plant and Associated Outbuildings  
 142 Lower Lyndon Street, Caribou  
 Aroostook County, Maine

0 50 100 200 Feet

Figure 2

Scale: 1:1,800

Project: 227-07

Drawn By: MDH  
 Date: 11/12/2022

